

## SUPPLEMENTARY MANUAL

for GPAT-D01

REMOVE THE SEATS AND THE SIDE FAIRINGS.

LIFT UP OR REMOVE THE FUEL TANK.



LOCATE THE WHITE, 3-POLE GEAR POSITION SENSOR CONNECTOR AT THE LEFT SIDE.

(WIRE COLORS IN THE CONNECTOR: BLACK, YELLOW/GREEN, BROWN/VIOLET.)



PLUG GIPRO CONNECTORS IN-LINE WITH THE GEAR POSITION SENSOR CONNECTORS.








## SUPPLEMENTARY MANUAL

for GPAT-D01

CONNECT GIPRO RED WIRE TO THE BROWN/WHITE WIRE AT THE IGNITION COIL CONNECTOR.

(BLACK, 3-POLE CONNECTOR AT THE LEFT SIDE.)

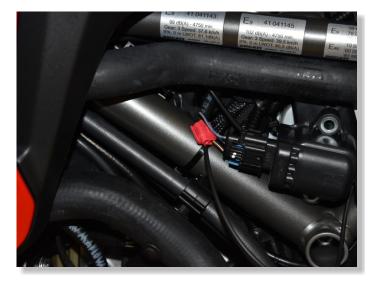

TYPICAL POSITION FOR THE GEAR INDICATOR.

