


# FIXED CALIPER

M4.30 a

10 20.A885.20

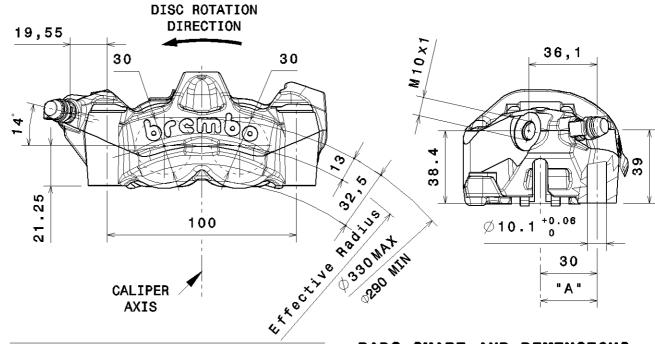

#### DESCRIPTION

Fixed caliper with 4 opposed pistons, made in a single body.


Construction material: Aluminium Alloy. Operating fluid: brake fluid DOT4.

N.B: Drawing shows left side caliper.

Code 20.A885.10.

Code 20.A885.20 specular. Mounting side behind the fork.

## PADS SHAPE AND DIMENSIONS



#### TECHNICAL CHARACTERISTICS

Pistons number and diameter:

4 30 mm Average pad surface

(1 pad):

19.6 cm<sup>2</sup>

MAX working pressure: 70 bar

Mass

"A" Disc position (TOLERANCE): ±1.40 mm

0.930 Kg (with sintered pad):

### CONFIGURATION

CHARACT.	PADS FRICTION	BODY	MOUNTING	USABLE DISCS	BRAKE FLUID
	MATERIAL	COLOUR	SIDE	THICKNESS	FOR PADS WEAR
20.A885.10 20	TOSHIBA TT 2910 HH	GREY TITANIUM	SX DX	5.0 mm	8.9 cm <sup>3</sup>

## **AVAILABLE SPARE PARTS**

SPARE CODE PARTS CALIPER		BLEEDER SCREW	20 B00TS	SPRING
20.A885.10	107.9882.30	105.3387.52	105.1502.20	120.2255.79

Indicating informations subject to modification. For further specifications contact Technical Section.

LAST UPDATE: 14.02.11